


PICO

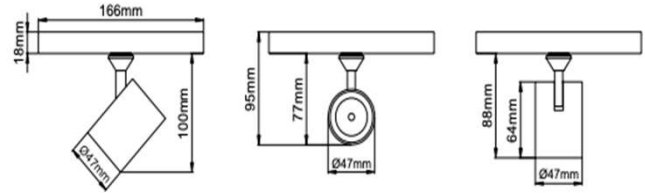

*Die-cast aluminium body.

*12V low voltage system.

* 220V anathtar dim option.

*Clever thermal design.

*With 3-phase universal track adaptor.

*1-10V, DALI and switch dimming options available upon request.

*Clear safety glass.

*Basic colours: white, black, silver, dark silver and special color options.


*Honeycomb filter, barn door, colour filter, antiglare screen and visor accesories available.


*Narrow, medium and wide beam angle options available with rotationally symmetric light distribution.

Mini Lale /PRSR-15160

LED POWER	5W	
SYSTEM POWER	6W	
LUMEN OUTPUT FROM FIXTURE CRI>80	3000K	420Lm
	4000K	445Lm
LUMEN OUTPUT FROM FIXTURE CRI>90	3000k	375Lm
	4000k	400Lm
BASIC COLOURS	WHITE	
	BLACK	
MAINS VOLTAGE	12V DC	
DALI DIMMING OPTION	YES	

ACCESSORIES



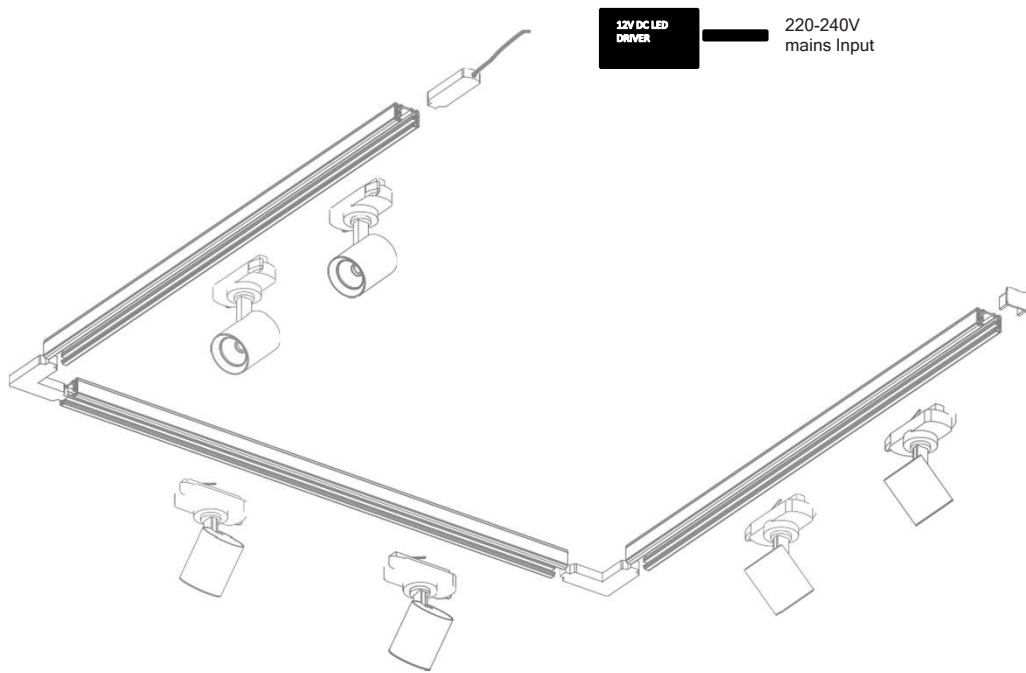

Minimal design low voltage tracklight. Can be installed to track up to the quantity that meets until the total power of central driver connected to single phase track system.

