



Mini Lale



Mini Lale /PRSR-31850

*Die-cast aluminium body.

*Mains voltage: 220-240V / 50-60Hz.

*Clever thermal design.

*With 3-phase universal track adaptor.

*1-10V, DALI and switch dimming options available upon request.


*Clear safety glass.

*Basic colours: white, black, silver, dark silver and special color options.

*Honeycomb filter, barn door, colour filter, antiglare screen and visor accessories available.

*Narrow, medium and wide beam angle options available with rotationally symmetric light distribution.

LED POWER	29W	
SYSTEM POWER	30W	
LUMEN OUTPUT FROM FIXTURE CRI>80	3000K	3500Lm
	4000K	3715Lm
LUMEN OUTPUT FROM FIXTURE CRI>90	3000k	3150Lm
	4000k	3340Lm
BASIC COLOURS	WHITE	
	BLACK	
MAINS VOLTAGE	220-240V/50-60HZ	
DALI DIMMING OPTION	YES	

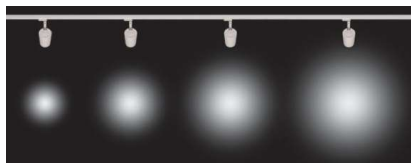

ACCESSORIES

